


C A M B R I D G E
E L E V A T O R


VOLT ELECTRIC



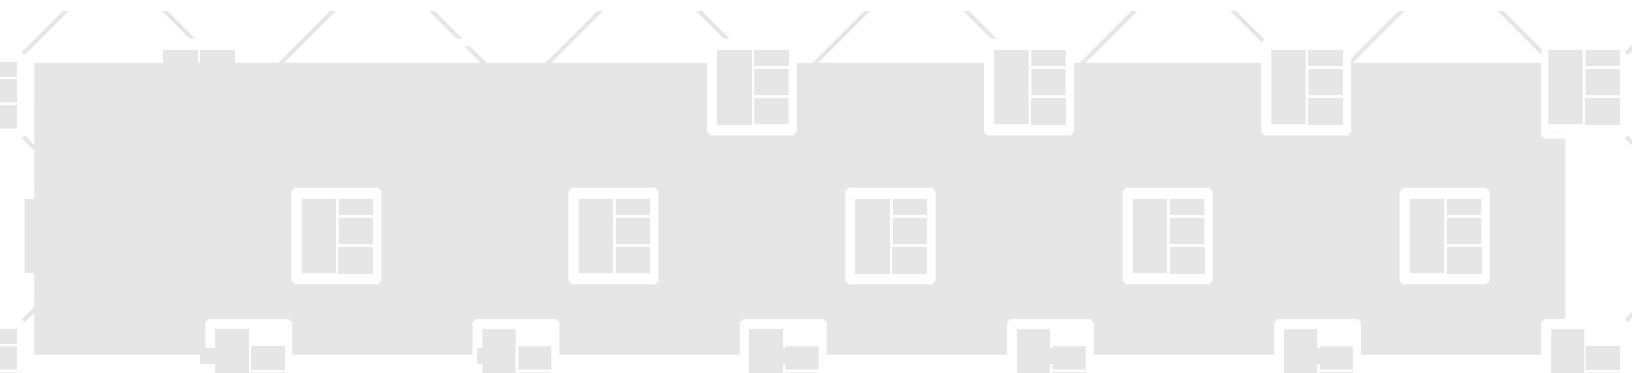

Volt at a Glance

Capacity of 750 lbs. (1000 lbs. available).
 Travels at a speed of up to 40 feet per minute in both directions.
 No machine room required. Needs space for controller and disconnects.
 Can be completely customizable to suit the surrounding décor.
 Interlock devices are installed on every landing to ensure that the door will not open if elevator is not at that floor. This is only one of the numerous safety features included.
 Emergency Battery Lowering with Overspeed Governor included.
 Quiet operation.

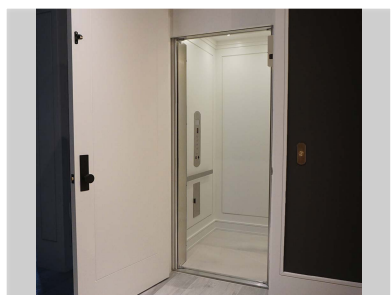

LEGACY VOLT

We can design an elevator to complement your home. Some choices are represented here:

Cab Walls

Standard choice one of:



Unfinished MDF
(standard)



Unfinished Oak
(standard)



Unfinished Maple
(standard)

Other available options:



Unfinished
Bamboo



Unfinished
Cherry



Unfinished
Walnut



Plastic Laminate Milled
with Stainless Steel Trim



Shaker Panel*

* Can only be applied to MDF cab walls

Cab Gates



Automatic Bifold Gate

View from inside elevator

These gates open automatically and fold away from cab opening to allow for a clear entrance.

Handrails



Brushed
Stainless Steel
(Standard)



Low Profile
Stainless Steel

Car Operating Panels



Stainless Steel
Radius (Standard)



Elongated COP
With Telephone Box
(Phone not included)

Digital Position Indicator

Applicable to
hall stations



Located in hallway.
DPI displays the
floor your elevator
is servicing

Hall Stations



Round Hall Station
Stainless-steel finish



Square Hall Station
Stainless-steel finish

Cab Lights

Standard LED lights – these powerful lights emit no heat and have a long life span.



Brushed
Stainless steel
(standard)



Chrome



Black

VOLT

Choose from one of the following configurations to suit your project:

General Specifications

CAB SIZES

Width x Depth

36" X 48" 36" X 54"
36" X 60" 40" X 54"
42" X 60"

POWER

120V, Single Phase, 15 Amp or
220V, Single Speed, 30 Amp

CAPACITY

1000 lbs.

DRIVE

Winding Drum

SPEED

40 fpm

CONTROLS

Automatic Push Button

EMERGENCY

Uninterrupted Battery Back-Up

NUMBER OF STOPS







6 Maximum inline
(to a maximum travel of 32ft)

DRIVE

Winding Drum

WARRANTY

36 months*

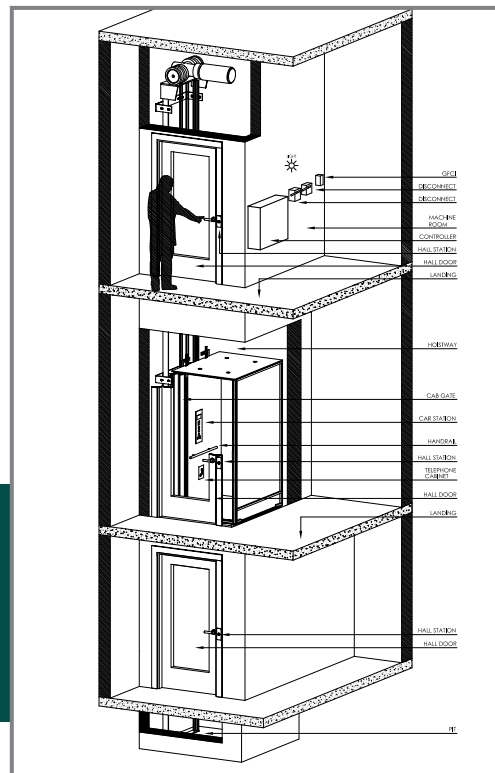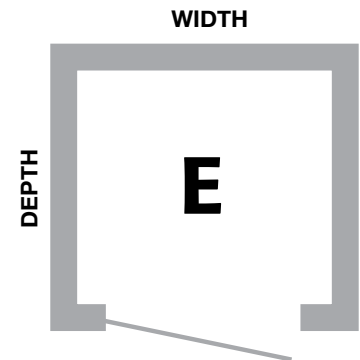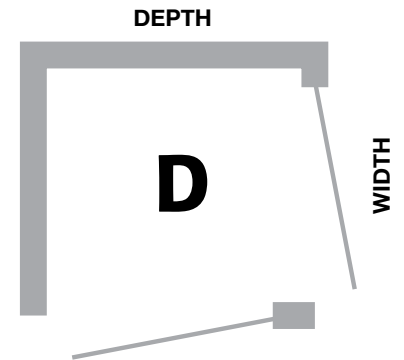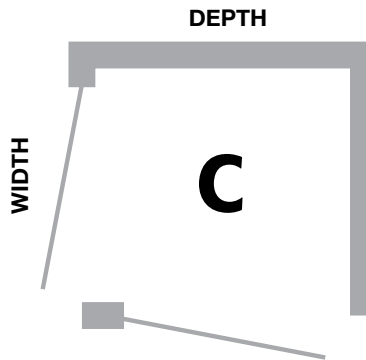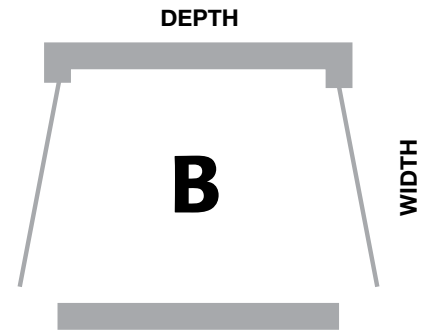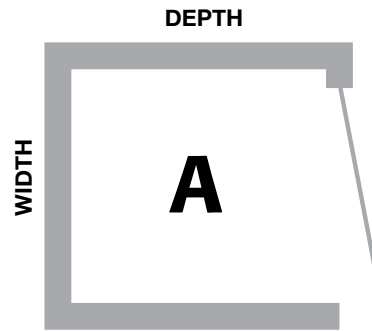

Please refer to our Planning Guide available on our website for all detailed measurements.